

Alumil

COMFORT M9050



SLIDING NON INSULATED SYSTEM

COMFORT M9050 is a non-insulated sliding system, with main characteristics the low weight and curved shape of the profiles.

- Basic system's depth 32 mm.
- Different designs and typologies available.
- Optional stainless steel rails offering smooth and easy gliding of the sashes.
- Supports single or double glazing up to 20 mm thickness.
- Ideally combined with the casement system COMFORT M9400.







TECHNICAL CHARACTERISTICS

Visible aluminium face width	85,5/97,6 mm
Frame height	30/44,7 mm
Frame width	71,7/78,2 mm
Sash height	65,5/77,6 mm
Sash width	32 mm
Interlocking profile width	79/83 mm
Sash weight	Up to 90 Kg
Glazing	6 up to 20 mm


TYOLOGIES




Double horizontal sliding sash




Double horizontal sliding sash with rolling shutter




Double horizontal sliding sash with fanlight




Four horizontal sliding sashes meeting stile

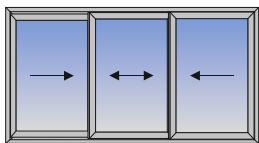


Triple horizontal sliding sashes



Single horizontal sliding sash with fixed lights

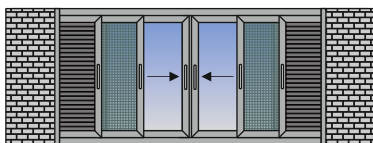

Double sliding pocket sash meeting stile with flyscreen & shutter



Single sliding pocket sash with flyscreen & shutter

CERTIFICATES

	Air permeability EN 1026, EN12207	CLASS 4
	Watertightness EN 1027, EN 12208	CLASS 2B
	Resistance to wind load EN 12210, EN 12211	CLASS B2